



DUESBERG®

Medical Plus

NITRILE EXAMINATION GLOVES

HIGHLIGHTS

HIGH-LEVEL HAND PROTECTION THROUGH EXCELLENT MECHANICAL STRENGTH

TEXTURED FINGERTIPS FOR A SECURE GRIP

PROTECTION AGAINST BACTERIA AND FUNGI



TESTED FOR SKIN IRRITATION AND SENSITIZATION

QUALITY PROTECTED BY COUNTERFEIT PROOF SECURITY LABEL TECHNOLOGY



INTENDED USE: INDUSTRIES

- PHARMACEUTICAL
- DENTISTRY
- HEALTHCARE
- PET CARE
- LABORATORY

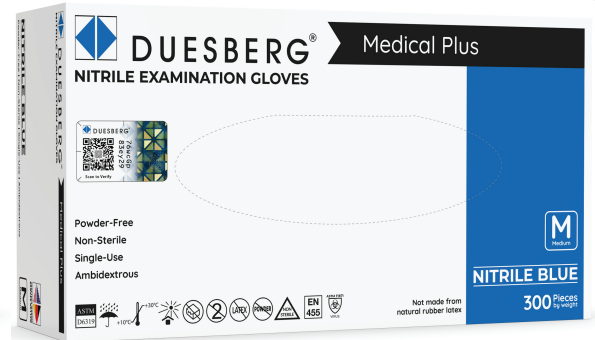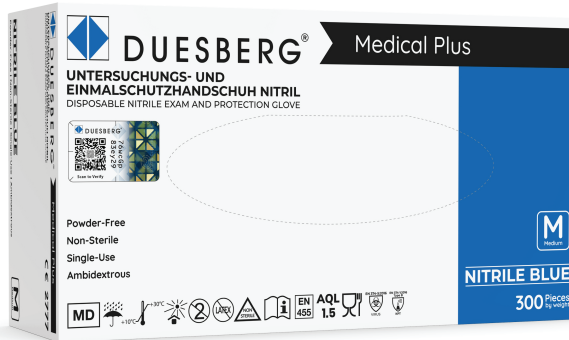

PRODUCT INFORMATION

| | |
|---|---|
| Material | Nitrile |
| Color | Nitrile Blue |
| Cuff length | Standard |
| Glove length(mm) min | 240 |
| Powder content | Powder-Free |
| External glove surface | Textured Finger |
| Freedom from holes (Inspection level 1) | AQL 1.5 |
| Quality Management System Audit | ISO 9001, ISO 13485, 21 CFR Part 820, MDSAP-Audit |
| Regulatory Standards | MDD (EU) 2017/745 Class I, PPE (EU) 2016/425 CAT III, Food (EC 1935/2004), EN 420 (upcoming EN ISO 21420), EN 455-1, EN 455-2, EN 455-3, EN 455-4, EN ISO 374-1, EN 374-2, EN 16523-1, EN 374-4, EN ISO 374-5, ASTM D6319, ASTM F1671, ASTM D6978 |

| Physical Performance | Before Aging | After Aging | Cuff thickness | Palm thickness | Fingertip thickness |
|----------------------|--------------|-------------|-------------------------|----------------|---------------------|
| Ultimate Elongation | >500% | >500% | ≥0.04mm | ≥0.06mm | ≥0.07mm |
| Tensile Strength | >14 Mpa | >14 Mpa | Application Temperature | <70°C | |
| Breakage Force | >6.0 N | >6.0 N | | | |

| Size | S | M | L | XL |
|--------------|---------|---------|----------|--------|
| Median (L)mm | S >240 | S >240 | S >240 | S >240 |
| Median w(mm) | 80 ± 10 | 95 ± 10 | 110 ± 10 | ≥110 |



For additional information visit us at www.duesberg-gloves.com