



# DUESBERG®

# Medical Premium

## NITRILE EXAMINATION GLOVES

### HIGHLIGHTS

HIGH-LEVEL HAND PROTECTION THROUGH EXCELLENT MECHANICAL STRENGTH

TEXTURED FINGERTIPS FOR A SECURE GRIP

PROTECTION AGAINST BACTERIA AND FUNGI



TESTED FOR SKIN IRRITATION AND SENSITIZATION

QUALITY PROTECTED BY COUNTERFEIT PROOF SECURITY LABEL TECHNOLOGY



### INTENDED USE: INDUSTRIES

- PHARMACEUTICAL
- DENTISTRY
- HEALTHCARE
- PET CARE
- LABORATORY

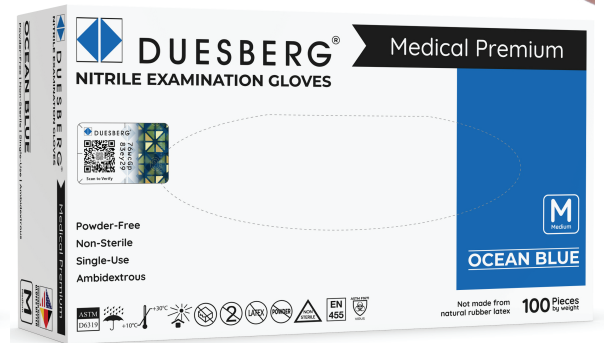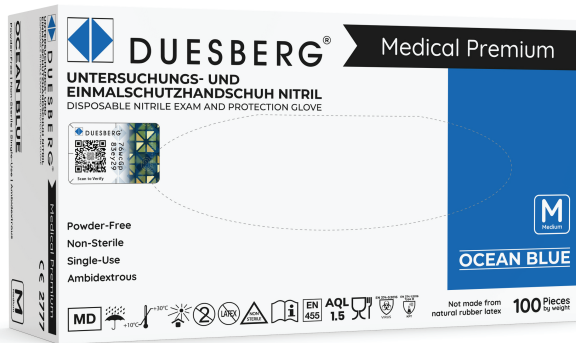

### PRODUCT INFORMATION

|   |  |
|---|--|
| Material                                | Nitrile  |
| Color                                   | Ocean Blue   |
| Cuff length                             | Standard   |
| Glove length(mm) min                    | 240  |
| Powder content                          | Powder-Free  |
| External glove surface                  | Textured Finger  |
| Freedom from holes (Inspection level 1) | AQL 1.5  |
| Quality Management System Audit         | ISO 9001, ISO 13485, 21 CFR Part 820, MDSAP-Audit  |
| Regulatory Standards                    | MDD (EU) 2017/745 Class I, PPE (EU) 2016/425 CAT III, Food (EC 1935/2004), EN 420 (upcoming EN ISO 21420 ), EN 455-1, EN 455-2, EN 455-3, EN 455-4, EN ISO 374-1, EN 374-2, EN 16523-1, EN 374-4, EN ISO 374-5, ASTM D6319, ASTM F1671, ASTM D6978 |

| Physical Performance | Before Aging | After Aging | Cuff thickness          | Palm thickness | Fingertip thickness |
|----------------------|--------------|-------------|-------------------------|----------------|---------------------|
| Ultimate Elongation  | >500%        | >500%       | ≥0.06mm                 | ≥0.08mm        | ≥0.10mm             |
| Tensile Strength     | >14 Mpa      | >14 Mpa     | Application Temperature | <70°C          |                     |
| Breakage Force       | >6.0 N       | >6.0 N      |                         |                |                     |

| Size         | S       | M       | L        | XL     |
|--------------|---------|---------|----------|--------|
| Median (L)mm | S >240  | S >240  | S >240   | S >240 |
| Median w(mm) | 80 ± 10 | 95 ± 10 | 110 ± 10 | ≥110   |



For additional information visit us at [www.duesberg-gloves.com](http://www.duesberg-gloves.com)